



726 SINGLE RACK OVEN


Available in gas, oil or electrically heated models.
Maximum tray size: 500 x 800 mm – one single rack

Swing diameter: 950 mm
Max load of rack lift and platform 200 kg

Revent's line of innovative baking technology is made to take any bread to the highest level. In bread we trust.



In Bread We Trust

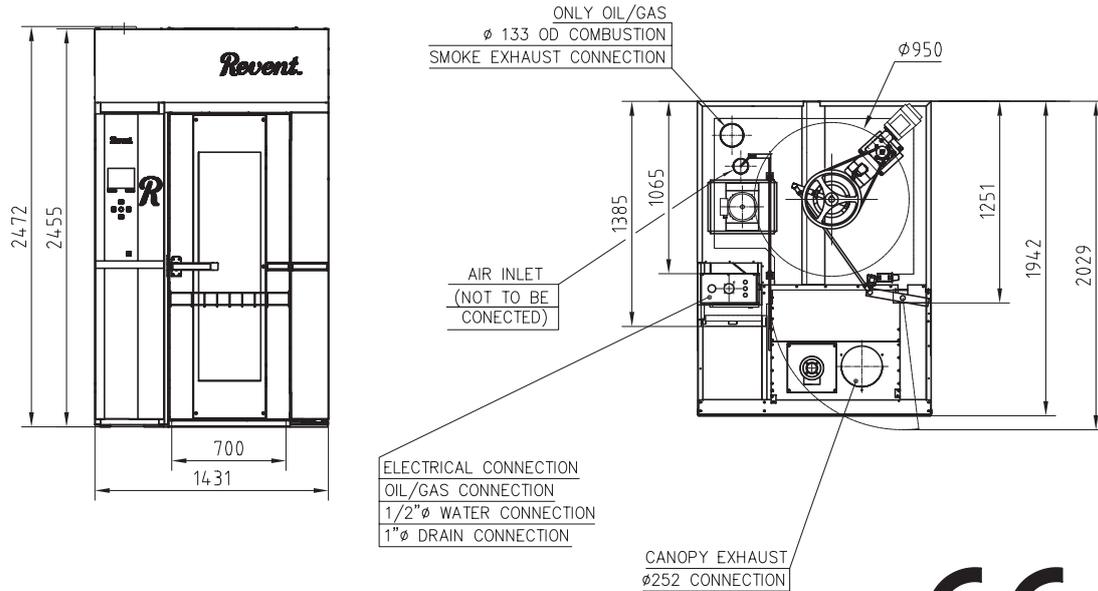

REVENT RACK OVEN 726



701313

Standard features

- > Revent TCC System
- > Revent HVS System
- > Revent LID System
- > Revent High Efficiency Heat Exchanger
- > Revent Wedge Installation System
- > Stainless Steel Design
- > Panel GIAC (Graphic InterActive Control)
- > Automatic Steam and Damper Control
- > Double glass door

Utility Requirements

Electrical

- > Electrical: available in 3-phase voltages

Water and Drain

- > Water Supply: G $\frac{1}{2}$ " ϕ 4,5 kg/cm² (450 kPa)
- > Drain: 1" connection
(optional connection to rear)

Ventilation

- > Over Pressure Duct:
Through door to canopy
- > Oven Damper Exhaust:
Through door to canopy
- > Oven Stack Exhaust: 133 mm ϕ
(oil and gas versions only)
- > Canopy Port: 252 mm ϕ

726 Electrically heated		
Voltage	Heating	Fuse
3PH220-230V	39-43kW	125A
3PH400/230V	43kW	80A
3PH415/240V	41kW	80A

726 Oil/gas heated		
Voltage	Heating	Fuse
3PH220-230V	50kW	16A
3PH400/230V	50kW	16A
3PH415/240V	50kW	16A

Technical information

- > Maximum Heat Capacity: see table below
- > Temperature range: 50–300 °C
- > Total shipping weight: 1100 kgs*
- > Minimum intake opening: 815 x 1420 mm (standard 2 section delivery)
- > Minimum intake opening: 1400 x 2500mm (optional – one piece shipment)
- > Minimum section tilt up height: 2650 mm
- > Swing diameter: 950 mm
- > Max load of rack lift and platform 200 kg
- > Steam Generation 4.5 l/20 sec
- > Installation requirements: The oven must be installed on a levelled, non-combustible floor. The oven may be installed flush against any wall – only the front and top need to be left open for access. The space on top of the oven must be well ventilated and the temperature must not exceed 50° C. This is to avoid damage to electrical components.

*Final shipping

Weights will depend on the final order specifications. Continuous product development is a Revent policy. Therefore, we reserve the right to change specifications and/or design without prior notice. Pictures or drawings may include product options.

Revent sales representative:



Revent International AB
PO Box 714, SE 194 27 Upplands Väsby, Sweden
Phone +46 8 590 006 00, fax +46 8 590 942 10
E-mail info@revent.se, www.revent.com