



725 SINGLE RACK OVEN


Available in gas, oil or electrically heated models.
Maximum tray size: 600 x 800 mm one single rack

Swing diameter: 1060 mm
Max load of rack lift and platform 400 kg

Revent's line of innovative baking technology is made to take any bread to the highest level. In bread we trust.



In Bread We Trust

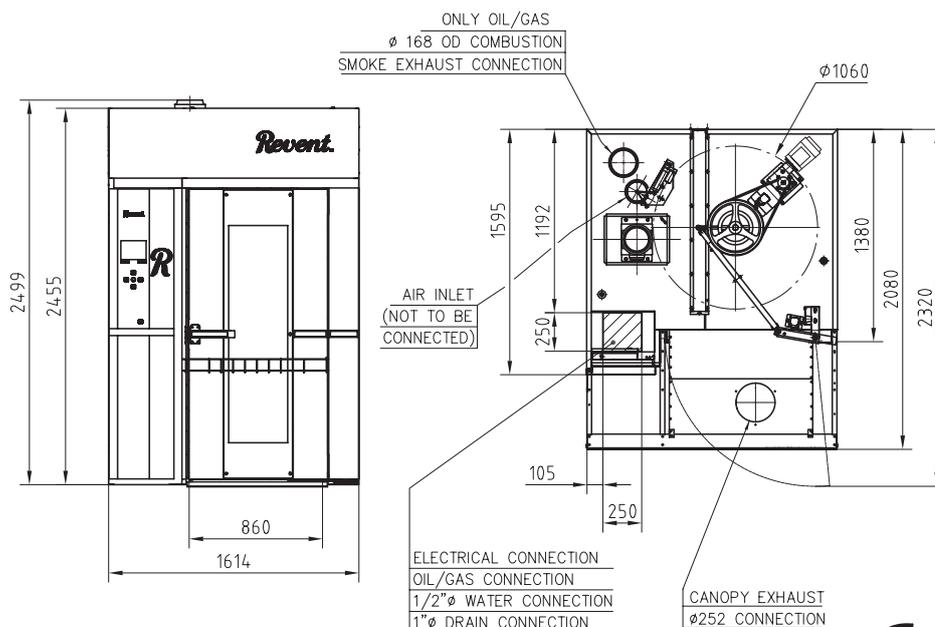

REVENT RACK OVEN 725



701312

Standard features

- > Revent TCC System
- > Revent HVS System
- > Revent LID System
- > Revent High Efficiency Heat Exchanger
- > Revent Wedge Installation System
- > Stainless Steel Design
- > Panel GIAC (Graphic InterActive Control)
- > Automatic Damper and Steam Control

Utility Requirements

Electrical

- > Electrical: available in 3-phase voltages

Water and Drain

- > Water Supply: G ½"Ø 4,5 kg/cm² (450 kPa)
- > Drain: 1" connection
(optional connection to rear)

Ventilation

- > Over Pressure Duct:
Through door to canopy
- > Oven Damper Exhaust:
Through door to canopy
- > Oven Stack Exhaust: 170 mm Ø
(oil and gas versions only)
- > Canopy Port: 252 mm Ø

725 Electrically heated

Voltage	Heating	Fuse
3PH220-230V	51.6-56.4kW	160A
3PH400/230V	57.2kW	100A
3PH415/240V	51.3kW	100A

725 Oil/gas heated

Voltage	Heating	Fuse
3PH220-230V	80kW	16A
3PH400/230V	80kW	16A
3PH415/240V	80kW	16A

Technical information

- > Maximum Heat Capacity: see table below
- > Temperature range: 50–300 °C
- > Total shipping weight: 1590 kgs*
- > Minimum intake opening:
870 x 1600 mm
(standard 2 section delivery)
- > Minimum intake opening: 1600 x 2510 mm
(optional – one piece shipment)
- > Minimum section tilt up height: 2700 mm
(with motor)
- > Swing diameter: 1060 mm
- > Max load of racklift and platform 400 kg
- > Steam Generation 7 l/20 sec
- > Installation requirements: The oven must be installed on a levelled, non-combustible floor. The oven may be installed flush against any wall – only the front and top need to be left open for access. The space on top of the oven must be well ventilated and the temperature must not exceed 50° C. This is to avoid damage to electrical components.

*Final shipping

Weights will depend on the final order specifications.

Continuous product development is a Revent policy. Therefore, we reserve the right to change specifications and/or design without prior notice. Pictures or drawings may include product options.

Revent sales representative:



Revent International AB
PO Box 714, SE 194 27 Upplands Väsby, Sweden
Phone +46 8 590 006 00, fax +46 8 590 942 10
E-mail info@revent.se, www.revent.com